


SPECIFICATIONS: SYVA


Description	2-way-passive enclosure, amplified by LA4X / LA8 / LA12X
Usable bandwidth (-10 dB)	87 Hz - 20 kHz ([SYVA])
Maximum SPL¹	137 dB ([SYVA])
Nominal directivity	Horizontal: 140° (>1 kHz) Vertical: +5/-21° in J shape (>1 kHz)
Transducers	MF: 6 x 5" HF: 3 x 1.75", compression driver
Acoustical load	MF: bass-reflex, L-Vents HF: DOSC, L-Fins
Nominal impedance	8 Ω
Connectors	IN: 4-point speakON® and screw terminal AutoConnect
Rigging and handling	DIN580 - compatible M8 threaded insert for secondary safety 2 integrated inserts for rigging accessory
Weight (net)	21 kg / 46 lb
Cabinet	First grade Baltic beech and birch plywood
Front	Steel grill with anti-corrosion coating Acoustically neutral 3D fabric
Finish	Fine grain dark grey brown Pantone 426C
IP	IP54

1- Peak level at 1 m under free field conditions using pink noise with crest factor 4 (preset specified in brackets).

DIRECTIVITY/BEAMWIDTH

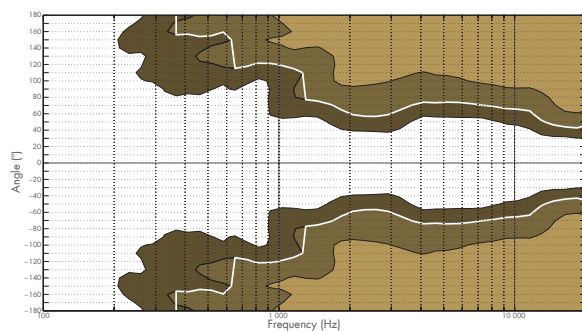


Beamwidth Syva horizontal 1/3 oct

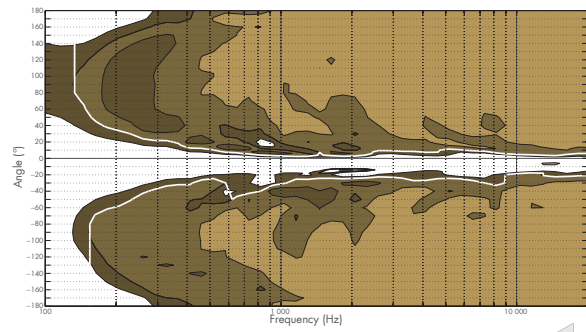

Beamwidth Syva vertical 1/3 oct



DIMENSIONS

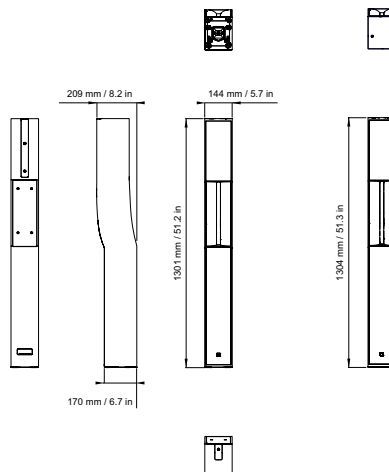

SPECIFICATIONS: SYVA LOW

Description	High power subwoofer, amplified by LA4X / LA8 / LA12X
Low frequency limit (-10 dB)	40 Hz ([SYVA LOW_100])
Maximum SPL¹	137 dB ([SYVA LOW_100])
Transducers	LF: 2 × 12"
Acoustical load	Bass-reflex, L-Vents
Nominal impedance	4 Ω
Connectors	IN: 4-point speakON® AutoConnect
Weight (net)	29 kg / 64 lb
Cabinet	First grade Baltic beech and birch plywood
Front	Steel grill with anti-corrosion coating Acoustically neutral 3D fabric
Finish	Fine grain dark grey brown Pantone 426C
IP	55

1- Peak level at 1 m under half space conditions using pink noise with crest factor 4 (preset specified in brackets).

SPECIFICATIONS: SYVA SUB

Description	Infra low frequency subwoofer, amplified by LA4X / LA8 / LA12X
Low frequency limit (-10 dB)	27 Hz ([SYVA SUB_100])
Maximum SPL¹	128 dB ([SYVA SUB_100])
Transducers	LF: 1 × 12"
Acoustical load	Bass-reflex, L-Vents
Nominal impedance	8 Ω
Connectors	IN: 4-point speakON® AutoConnect
Weight (net)	27 kg / 60 lb
Cabinet	First grade Baltic beech and birch plywood
Front	Steel grill with anti-corrosion coating Acoustically neutral 3D fabric
Finish	Fine grain dark grey brown Pantone 426C
IP	55

1- Peak level at 1 m under half space conditions using pink noise with crest factor 4 (preset specified in brackets).

DIMENSIONS

