


SPECIFICATIONS

Description	Passive 2-way coaxial enclosure, controlled and amplified by LA4X / LA8
Usable bandwidth (-10 dB)	60 Hz - 20 kHz ([X8] preset)
Maximum SPL¹	129 dB ([X8] preset)
Nominal directivity	Axisymmetric 100°
Monitoring angle²	35°
Transducers	LF: 1 × 8", bass-reflex, laminar vents HF: 1 × 1.5" neodymium compression driver
Nominal impedance	8 Ω
Connectors	IN: SpeakON® LINK: SpeakON®
Rigging and handling	1 × handle DIN580-compatible M8 threaded insert 4 × M10 threaded inserts 35 mm pole socket
Weight (net)	12 kg / 26.5 lb
Cabinet	First grade Baltic birch and beech plywood
Finish	Dark grey brown Pantone® 426C Pure white RAL® 9010 Custom RAL® code on special order
IP	IP43

1- Peak level at 1 m under free field conditions using 12 dB crest factor pink noise with preset specified in brackets.
2- With regard to vertical.

BEAMWIDTH

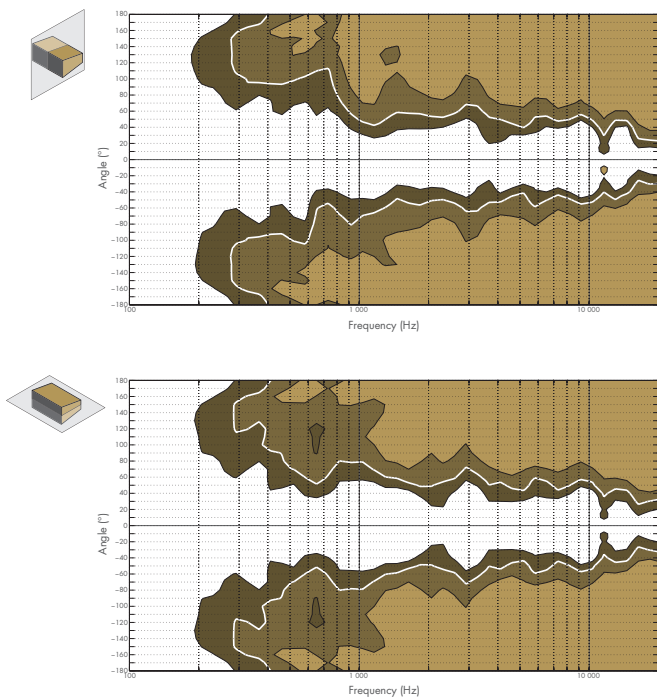

► Dispersion angle diagram of a single X8 in vertical (top) and horizontal (bottom) plane using lines of equal sound pressure at -3 dB, -6 dB, -12 dB.

DIMENSIONS

