
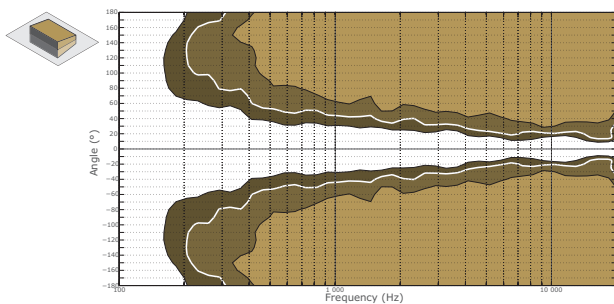


SPECIFICATIONS

Description	Active 2-way coaxial enclosure, controlled and amplified by LA4X / LA8
Usable bandwidth (-10 dB)	55 Hz - 20 kHz ([X15] preset)
Maximum SPL¹	136 dB ([X15] preset)
Nominal directivity	Vertical: 60° Horizontal: 40°
Monitoring angle²	35° without risers 55° with risers
Transducers	LF: 1 × 15" neodymium, bass-reflex, laminar vents HF: 1 × 3" neodymium compression driver, ellipsoid waveguide
Nominal impedance	LF: 8 Ω HF: 8 Ω
Connectors	IN: SpeakON® LINK: SpeakON®
Rigging and handling	2 × handles DIN580-compatible M8 threaded insert 4 × M10 threaded inserts 2 × 35 mm pole sockets
Weight (net)	21 kg / 46.2 lb
Cabinet	First grade Baltic birch and beech plywood
Finish	Dark grey brown Pantone® 426C Custom RAL® code on special order
IP	IP43

1- Peak level at 1 m under free field conditions using 10 dB crest factor pink noise with preset specified in brackets.
2- With regard to vertical.

BEAMWIDTH

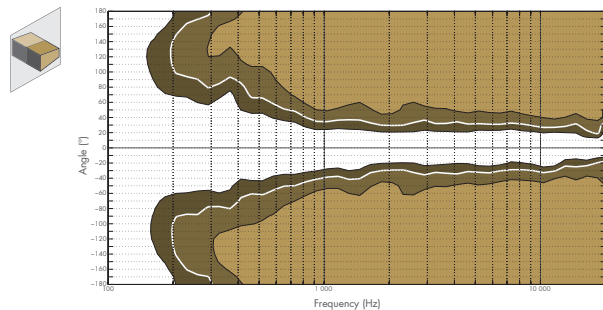

► Dispersion angle diagram of a single X15 HiQ in vertical (top) and horizontal (bottom) plane using lines of equal sound pressure at -3 dB, -6 dB, -12 dB.

DIMENSIONS

