


SPECIFICATIONS

Description	Passive 2-way coaxial enclosure, controlled and amplified by LA4X / LA8
Usable bandwidth (-10 dB)	95 Hz – 20 kHz ([5XT] preset)
Maximum SPL¹	119 dB ([5XT] preset)
Nominal directivity	110° axisymmetric
Transducers	LF: 1 × 5" weather resistant, bass-reflex HF: 1 × 1" compression driver
Nominal impedance	16 Ω
Connectors	IN: 1 × 4-point SpeakON® and screw terminal LINK: 1 × 4-point SpeakON® and screw terminal
Rigging and handling	1 × 3/8" insert for microphone stand 2 × M6 inserts for ETR5 U-bracket
Weight (net)	3.5 kg / 7.7 lb
Cabinet	First grade Baltic birch plywood
Finish	Dark grey brown Pantone® 426C Pure white RAL® 9010 Custom RAL® code on special order
IP	IP30 or IP35 under specific conditions ²

1- Peak level at 1 m under free field conditions using 10 dB crest factor pink noise with preset specified in brackets.
2- Please consult application@l-acoustics.com for more information.

BEAMWIDTH

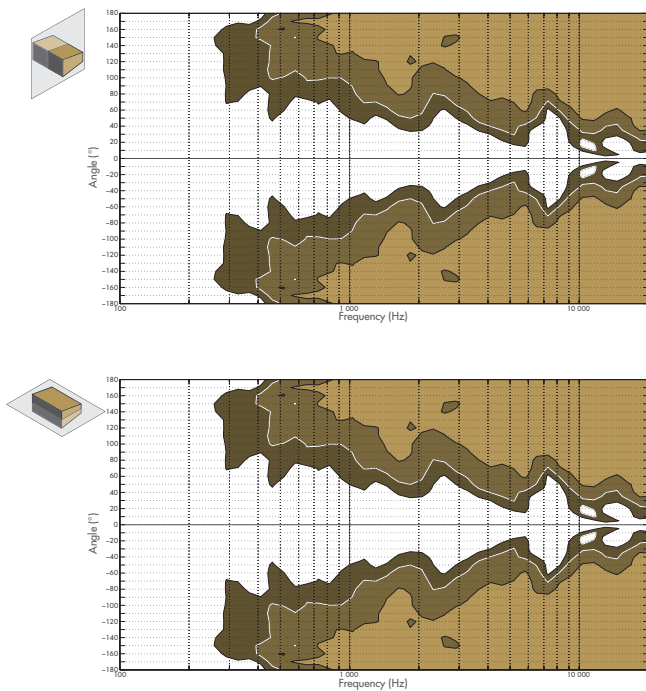

► Dispersion angle diagram of a single 5XT in vertical (top) and horizontal (bottom) plane using lines of equal sound pressure at -3 dB, -6 dB, -12 dB.

DIMENSIONS

